

检测报告

TEST REPORT

报告编号:
Report No.

J201810082489-0001

第 1 页 共 4 页
Page of

委托方

Client

Nemko Shenzhen

委托方地址

Address

深圳市南山区科技园科发路8号金融基地2栋10楼CD单元

仪器/样品名称

Description

Sharp edge tester

型号/规格

Model/Type

SET-50

制造厂

Manufacturer

Kingpo Technology Development Limited

出厂编号

Serial No.

1801059

管理号

Asset No. _____

检测日期

Date of Test

2018年10月17日

Y M D

样品接收日期

Date of Receipt

2018年10月10日

Y M D

批准人:

Approved Signatory

李伟忠(主管)

审核:

Inspected by

伍水生

检测:

Tested by

水婧婧

报告专用章
(Stamp)

地址: 广东省广州市黄埔大道西平云路163号

Address: No.163.Pingyun Rd, West of HuangPu Ave.Guangzhou.Guangdong.China

计量校准机构备案号(The record number): [2012]粤量校S003号

联系电话(Tel.): 020-38699960,66830999,400-602-0999

传真(Fax): 020-38698685

网站(Website): <http://www.grgtest.com>

邮政编码(Postcode): 510656

电子邮件(E-mail): grgtest@grgtest.com

扫一扫验真伪

检测说明

DIRECTIONS OF TEST

报告编号: J201810082489-0001

第 2 页 共 4 页

Report No.

Page of

1. 本实验室出具的数据均可溯源至国家计量基准和国际单位制(SI).
(All data issued by GRGTest are traced to National Primary Standards and International System of Units(SI).)
2. 本结果仅对当次被测样品有效, 如有疑问请在15个工作日内反馈。(The result is ONLY valid for the tested sample, please feedback to us within 15 working days if you have any question.)
3. 本报告编号具有唯一性, 后缀若带有“-Gx”的报告为替换报告, 自发出后原报告即刻作废。
(Each report has a unique number. The suffix of "-Gx" will be added to the number as a replacement of the old version. The original report will be officially invalid once the new report number is issued.)
4. 证书中如有最大允许误差、判定结果, 仅供参考, 其中“P”代表“合格”, “F”代表“不合格”。证书中结论判定是指测得值是否符合规定要求的限定值, 而使用人员还应结合实际测量要求, 评估测试结果测量不确定度对符合性评定的影响。(MPE & judgement result in the datasheet is only for reference, "P" represents "Pass" and "F" represents "Fail". The judgement is made on the basis of whether the measured value conforms to the limited value specified in the regulation, whereas users should evaluate the effects of measurement uncertainty of test results on conformity determination associated with actual measurement.)
5. 检测报告中的数据仅用于科研、教学、内部质量控制等目的。(The data in the test report are used only for scientific research, teaching, internal quality control and so on.)
6. 本次检测的技术依据(Reference documents for the Test):
GB 6675.2-2014 玩具安全 第2部分: 机械与物理性能 (5.8款 锐利边缘测试) Safety of toys-Part2: Mechanical and physical properties

7. 本次检测使用的主要测量标准(Main Standards of Measurement Used in the Test.):

名称 / 型号 Description / Model	编号 Serial No.	证书编号 Certificate No.	证书有效期 Due Date	技术特征 Technique Character
数显千分尺/(0~25) mm	45122480	J201803051136-0012	2019-03-05	MPE:±2μm
图像处理万能工具显微镜 /JX13C	ZH0020	CYY201800433	2019-05-13	MPE: (1+L/100)μm
数显量仪测力仪/SLC	3096	J201807096743-0007	2019-07-09	0.5级

8. 检测地点、环境条件(Place and environmental conditions of the test):

地点 Place	广州计量长度精密测量室	温度 Temperature	20.2 °C	相对湿度 Relative Humidity	65 %
-------------	-------------	-------------------	---------	---------------------------	------

9. 建议复测时间间隔: 1 年, 送测单位也可按实际使用情况自主决定。
Suggested test interval is 1 year or it can be altered depending on the actual usage of the user.

检测结果

RESULTS OF TEST

报告编号: J201810082489-0001

第 3 页 共 4 页

Report No.

Page of

项目

Subject

1、外观及各部分相互作用: 符合要求

Appearance and Interreaction:

2、力值测量:


Force measurement:

标称值/LBF	实测值/LBF	不确定度/LBF
Nominal value	Measured Value	$U(k=2)$
1.6	1.65	0.04

3、尺寸测量:

Dimensional measurement:

标称值(mm)	实测值(mm)	扩展不确定度(mm)
Nominal	Measured	$U(k=2)$
12.7	12.636	0.005
19	18.99	0.02
6.4	6.323	0.005
15.9	15.03	0.02

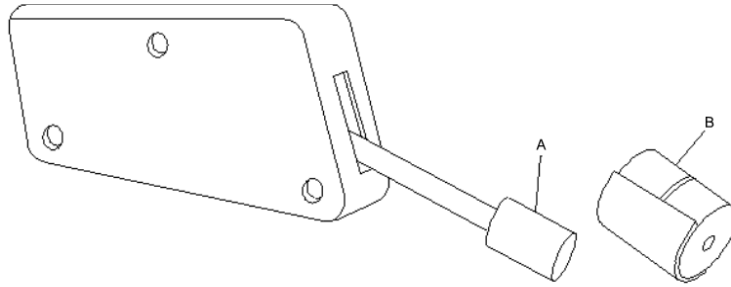

IEC 0556/14

Key

A – Head, steel, 12.7 mm diameter, 19 mm long

B – Tape cap, maximum 15.9 mm diameter removable sleeve

检测结果 RESULTS OF TEST

报告编号: J201810082489-0001


第 4 页 共 4 页

Report No.

Page of

- 8 -

TR 62854 © IEC:2014

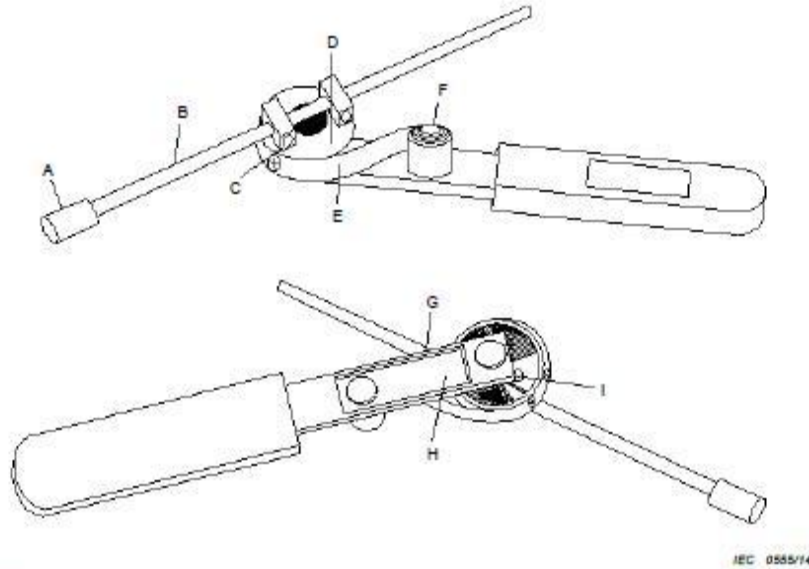

Key

- A - Head, steel, 12,7 mm diameter, 19 mm long
- B - Arm, steel, 6,4 mm diameter adjustable
- C - Adjustment screw
- D - Main drum, free to rotate on stud, sleeve bearing
- E - Negator s-ring, 12,7 mm wide, 165 mm long
- F - Storage drum, free to rotate on stud, sleeve bearing
- G - Adjustable wrench
- H - Handle assembly
- I - Stop

Figure 1 - Sharp edge tester

备注: Notes:

1. 结论(Conclusion): 按检测结果使用
2. 本报告中的扩展不确定度是由标准不确定度乘以包含概率约为95%时的包含因子 k 。
The expanded uncertainty is given in the report by the standard uncertainty multiplied by the probability of about 95% when the factor k .
3. 依据(Reference document)
JJF 1059.1-2012 测量不确定度评定与表示
(JJF 1059.1-2012 Evaluation and Expression of Uncertainty in Measurement)
4. 受力位置为测试头黑线部位
The position of the force is the black line of the test head.
5. $1 \text{ LBF} \approx 4.445 \text{ N}$
6. 检测项目按客户要求。
Test projects are according to the customer requirements.

(以下空白)
(The below is blank)